
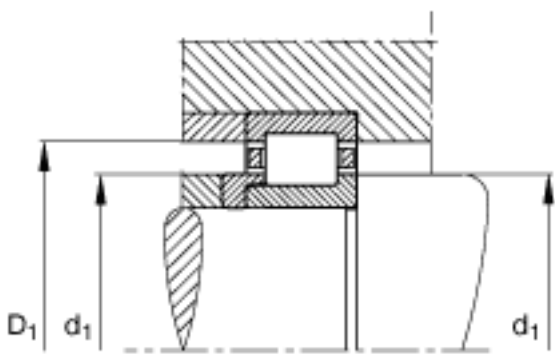


FAG NJ221-E-TVP2 + HJ221-E参数

| | | | | |
|--------|---------------|---------|-------|-------------|
| 尺寸 | d_1 | 134.5 | mm | - |
| | $d_{a \max}$ | 123 | mm | - |
| | $d_{a \min}$ | 117 | mm | - |
| | $d_{c \min}$ | 137 | mm | - |
| | E | 171.5 | mm | - |
| | F | 125.5 | mm | - |
| | $r_{1 \min}$ | 2.1 | mm | - |
| | $r_{a \max}$ | 2.1 | mm | - |
| | $r_{al \max}$ | 2.1 | mm | - |
| | r_{\min} | 2.1 | mm | - |
| | s | 1.3 | mm | 距离中心位置的轴向偏移 |
| 说明 | | HJ221-E | | 型号, L 型圈 |
| 重量 | m | 4170 | g | 质量 |
| | m_1 | 510 | g | 质量, L 型圈 |
| 基本额定载荷 | C_r | 310000 | N | 基本额定动载荷, 径向 |
| | C_{0r} | 320000 | N | 基本额定静载荷, 径向 |
| 极限转速 | n_G | 4350 | r/min | 极限转速 |
| 参考转速 | n_B | 3450 | r/min | 参考速度 |
| 疲劳极限载荷 | C_{ur} | 53000 | N | 疲劳极限载荷, 径向 |
| 尺寸 | d | 105 | mm | - |
| | D | 190 | mm | - |
| | B | 36 | mm | - |
| | B_1 | 10 | mm | - |
| | B_2 | 16 | mm | - |
| | D_1 | 165.1 | mm | - |
| | $D_{a \max}$ | 178 | mm | - |

FAG NJ221-E-TVP2 + HJ221-E图片

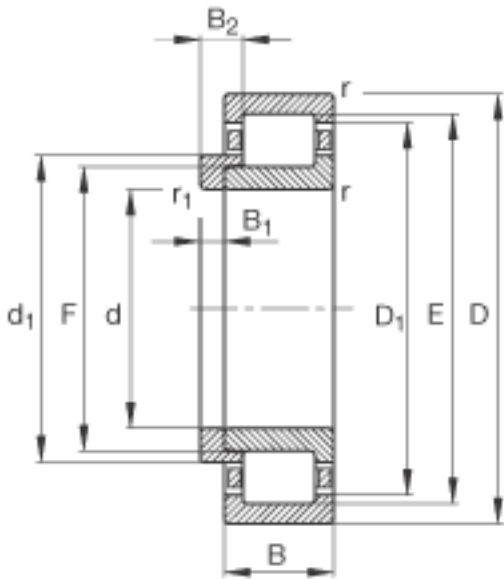

参考资料:<http://www.sozhou.com/p/f6d27d21.html>

