
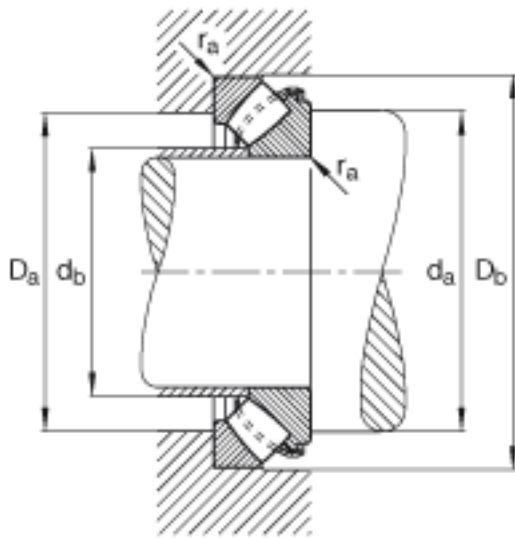


FAG 29324-E1参数

尺寸	d	120	mm	-
	D	210	mm	-
	T	54	mm	-
	A	70	mm	-
	D ₁	154	mm	-
	D _{a max}	182	mm	-
	D _{b min}	213	mm	-
	d ₁	192.6	mm	-
	d _{a min}	165	mm	-
	d _{b max}	129	mm	-
	r _{a max}	2	mm	-
	r _{min}	2.1	mm	-
	T ₁	27	mm	-
	T ₃	34	mm	-
	T ₅	48	mm	-
重量	m	7200	g	质量
基本额定载荷	C _a	800000	N	基本额定动载荷, 轴向
	C _{0a}	2210000	N	基本额定静载荷, 轴向
极限转速	n _G	3350	r/min	极限转速
参考转速	n _B	1710	r/min	参考速度
疲劳极限载荷	C _{ua}	285000	N	疲劳极限载荷, 轴向

FAG 29324-E1图片

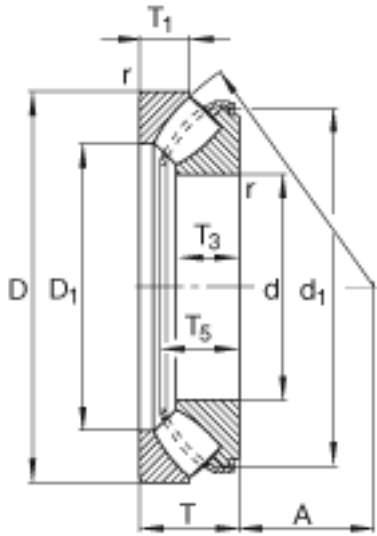

参考资料: <http://www.sozhou.com/p/f70cf980.html>

