
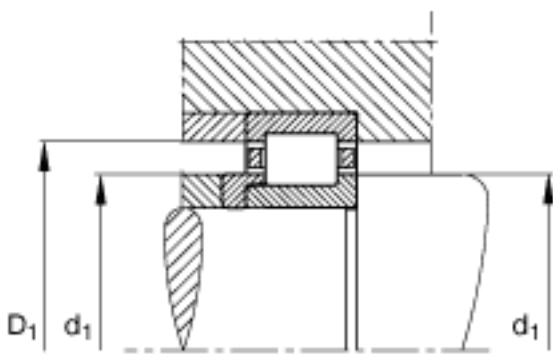


FAG NJ326-E-TVP2 + HJ326-E参数

基本额定载荷	C_{0r}	670000	N	基本额定静载荷，径向
极限转速	n_G	2850	r/min	极限转速
参考转速	n_B	2460	r/min	参考速度
疲劳极限载荷	C_{ur}	105000	N	疲劳极限载荷，径向
尺寸	d	130	mm	-
	D	280	mm	-
	B	58	mm	-
	B_1	14	mm	-
	B_2	23	mm	-
	D_1	235.2	mm	-
	$D_{a \max}$	263	mm	-
	d_1	181.7	mm	-
	$d_{a \max}$	164	mm	-
	$d_{a \min}$	147	mm	-
	$d_{c \min}$	184	mm	-
	E	247	mm	-
	F	167	mm	-
	$r_{1 \min}$	4	mm	-
	$r_{a \max}$	3	mm	-
	$r_{al \max}$	3	mm	-
	r_{\min}	4	mm	-
	s	3.5	mm	距离中心位置的轴向偏移
说明		HJ326-E		型号，L 型圈
重量	m	16500	g	质量
	m_1	1640	g	质量，L 型圈
基本额定载荷	C_r	680000	N	基本额定动载荷，径向

FAG NJ326-E-TVP2 + HJ326-E图片

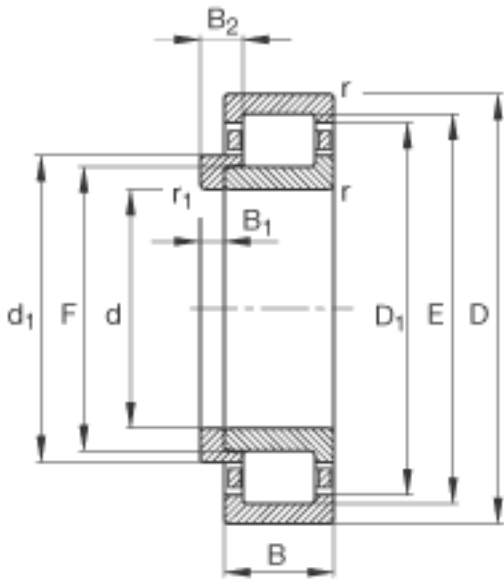

参考资料:<http://www.sozhou.com/p/f8e1e30a.html>

