


FAG NJ2234-E-M1 参数

| | | | | |
|--------|---------------|---------|-------|-------------|
| 尺寸 | $r_{a \max}$ | 3 | mm | - |
| | $r_{al \max}$ | 3 | mm | - |
| | r_{\min} | 4 | mm | - |
| | s | 7.2 | mm | 距离中心位置的轴向偏移 |
| 重量 | m | 29800 | g | 质量 |
| 基本额定载荷 | C_r | 1130000 | N | 基本额定动载荷, 径向 |
| | C_{0r} | 1400000 | N | 基本额定静载荷, 径向 |
| 极限转速 | n_G | 3300 | r/min | 极限转速 |
| 参考转速 | n_B | 1500 | r/min | 参考速度 |
| 疲劳极限载荷 | C_{ur} | 213000 | N | 疲劳极限载荷, 径向 |
| 尺寸 | d | 170 | mm | - |
| | D | 310 | mm | - |
| | B | 86 | mm | - |
| | B_1 | 12 | mm | - |
| | B_2 | 24 | mm | - |
| | D_1 | 269.9 | mm | - |
| | $D_{a \max}$ | 293 | mm | - |
| | d_1 | 219 | mm | - |
| | $d_{a \max}$ | 204 | mm | - |
| | $d_{a \min}$ | 187 | mm | - |
| | $d_{c \min}$ | 223 | mm | - |
| | F | 205 | mm | - |
| | $r_{l \min}$ | 4 | mm | - |

FAG NJ2234-E-M1 图片



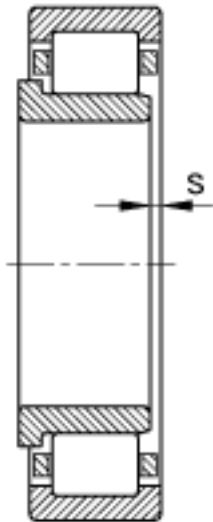

参考资料:<http://www.sozhou.com/p/0df25e97.html>