


FAG 23056-B-K-MB + AH3056参数

尺寸	$d_{1H}$	260	mm	-	
	D	420	mm	-	
	B	106	mm	-	
	a	8	mm	-	
	b	24	mm	-	
	$D_1$	376.5	mm	-	
	$D_{a \max}$	405.4	mm	-	
	d	280	mm	-	
	$d_{2G}$	Tr300x4		-	
	$d_{a \min}$	294.6	mm	-	
	$d_s$	9.5	mm	-	
	l	131	mm	-	
	$n_s$	17.7	mm	-	
	$r_{a \max}$	3	mm	-	
	$r_{\min}$	4	mm	-	
	说明		AH3056		型号, 退卸套
	重量	m	50300	g	质量
$m_1$		12000	g	质量, 退卸套	
基本额定载荷	$C_r$	1560000	N	基本额定动载荷, 径向	
计算系数	e	0.25		-	
	$Y_1$	2.74		-	
	$Y_2$	4.08		-	
基本额定载荷	$C_{0r}$	3000000	N	基本额定静载荷, 径向	
计算系数	$Y_0$	2.68		-	
极限转速	$n_G$	1750	r/min	极限转速	
参考转速	$n_B$	1090	r/min	参考速度	
疲劳极限载荷	$C_{ur}$	156000	N	疲劳极限载荷, 径向	

FAG 23056-B-K-MB + AH3056图片

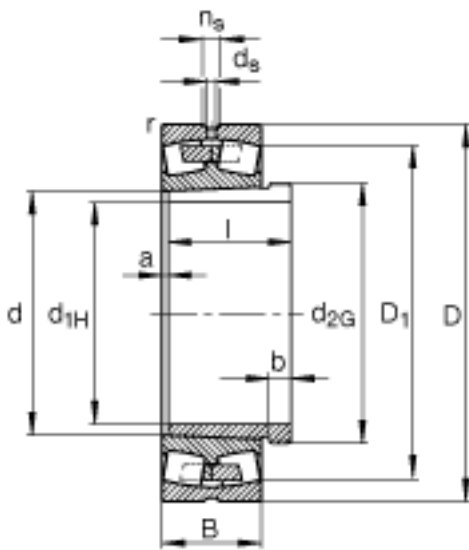

参考资料:<http://www.sozhou.com/p/a882403e.html>