


FAG NJ319-E-TVP2 + HJ319-E参数

尺寸	$d_{c \min}$	134	mm	-
	E	177.5	mm	-
	F	121.5	mm	-
	$r_{l \min}$	3	mm	-
	$r_{a \max}$	2.5	mm	-
	$r_{al \max}$	2.5	mm	-
	r_{\min}	3	mm	-
	s	1.4	mm	距离中心位置的轴向偏移
说明		HJ319-E		型号, L 型圈
重量	m	6440	g	质量
	m_1	777	g	质量, L 型圈
基本额定载荷	C_r	390000	N	基本额定动载荷, 径向
	C_{0r}	380000	N	基本额定静载荷, 径向
极限转速	n_G	4050	r/min	极限转速
参考转速	n_B	3600	r/min	参考速度
疲劳极限载荷	C_{ur}	64000	N	疲劳极限载荷, 径向
尺寸	d	95	mm	-
	D	200	mm	-
	B	45	mm	-
	B_1	13	mm	-
	B_2	20.5	mm	-
	D_1	169.6	mm	-
	$D_{a \max}$	186	mm	-
	d_1	132	mm	-
	$d_{a \max}$	119	mm	-
	$d_{a \min}$	109	mm	-

FAG NJ319-E-TVP2 + HJ319-E图片

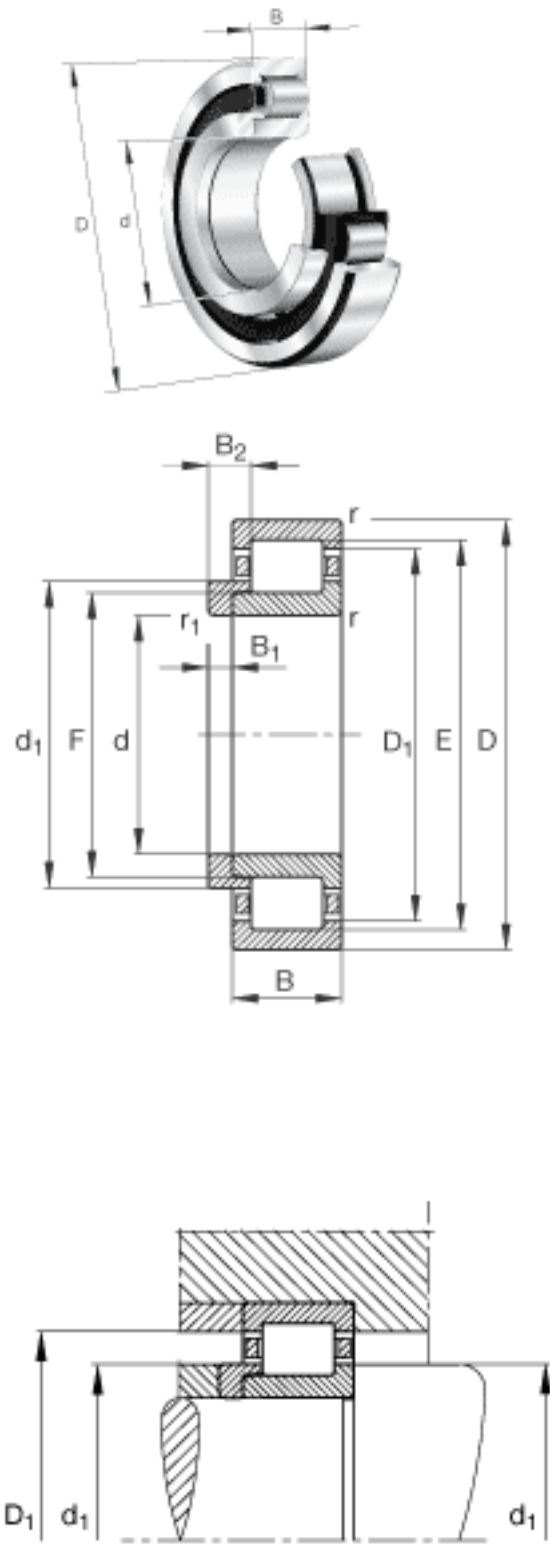

参考资料:<http://www.sozhou.com/p/02dfe482.html>

