
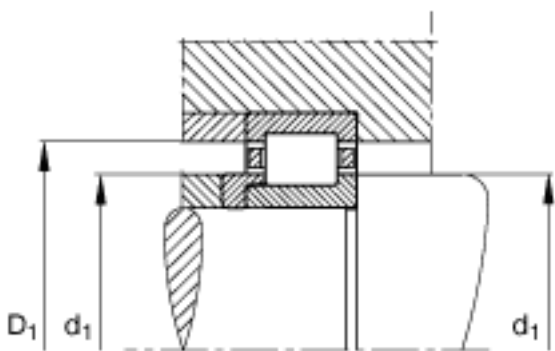


FAG NJ207-E-TVP2 + HJ207-E参数

尺寸	d	35	mm	-	
	D	72	mm	-	
	B	17	mm	-	
	B ₁	4	mm	-	
	B ₂	7	mm	-	
	D ₁	61	mm	-	
	D _{a max}	65	mm	-	
	d ₁	48	mm	-	
	d _{a max}	43	mm	-	
	d _{a min}	39	mm	-	
	d _{c min}	50	mm	-	
	E	64	mm	-	
	F	44	mm	-	
	r _{1 min}	0.6	mm	-	
	r _{a max}	1	mm	-	
	r _{al max}	0.6	mm	-	
	r _{min}	1.1	mm	-	
	s	0.7	mm	距离中心位置的轴向偏移	
	说明		HJ207-E		型号, L 型圈
	重量	m	309	g	质量
m ₁		32	g	质量, L 型圈	
基本额定载荷	C _r	59000	N	基本额定动载荷, 径向	
	C _{0r}	50000	N	基本额定静载荷, 径向	
极限转速	n _G	12300	r/min	极限转速	
参考转速	n _B	8300	r/min	参考速度	
疲劳极限载荷	C _{ur}	7600	N	疲劳极限载荷, 径向	

FAG NJ207-E-TVP2 + HJ207-E图片

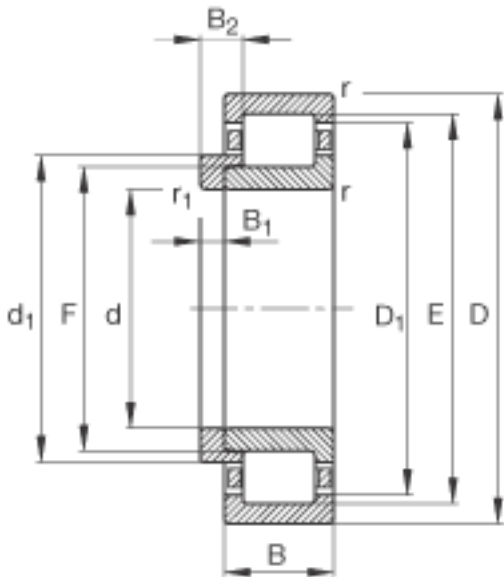

参考资料:<http://www.sozhou.com/p/0c571587.html>

