


FAG NJ319-E-TVP2参数

尺寸	$r_{1 \text{ min}}$	3	mm	-
	$r_{a \text{ max}}$	2.5	mm	-
	$r_{al \text{ max}}$	2.5	mm	-
	r_{min}	3	mm	-
	s	1.4	mm	距离中心位置的轴向偏移
重量	m	6440	g	质量
基本额定载荷	C_r	390000	N	基本额定动载荷，径向
	C_{0r}	380000	N	基本额定静载荷，径向
极限转速	n_G	4050	r/min	极限转速
参考转速	n_B	3600	r/min	参考速度
疲劳极限载荷	C_{ur}	64000	N	疲劳极限载荷，径向
尺寸	d	95	mm	-
	D	200	mm	-
	B	45	mm	-
	B_1	13	mm	-
	B_2	20.5	mm	-
	D_1	169.6	mm	-
	$D_{a \text{ max}}$	186	mm	-
	d_1	132	mm	-
	$d_{a \text{ max}}$	119	mm	-
	$d_{a \text{ min}}$	109	mm	-
	$d_{c \text{ min}}$	134	mm	-
	F	121.5	mm	-

FAG NJ319-E-TVP2图片



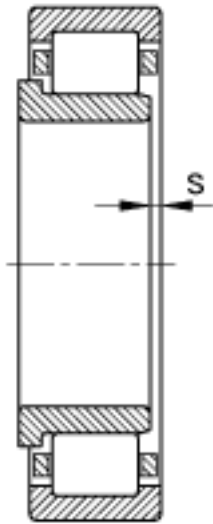

参考资料:<http://www.sozhou.com/p/20ed84a2.html>