
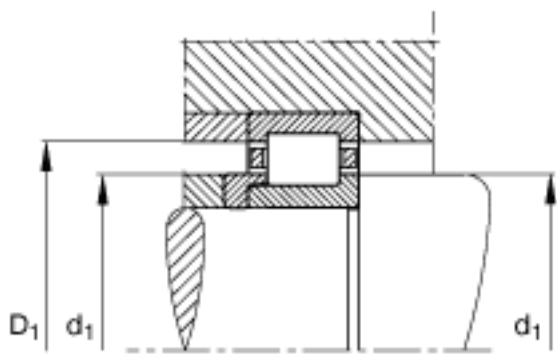


### FAG NJ215-E-TVP2 + HJ215-E参数

重量	$m_1$	164	g	质量, L 型圈
基本额定载荷	$C_r$	155000	N	基本额定动载荷, 径向
	$C_{0r}$	157000	N	基本额定静载荷, 径向
极限转速	$n_G$	6500	r/min	极限转速
参考转速	$n_B$	4500	r/min	参考速度
尺寸	$d$	75	mm	-
	$D$	130	mm	-
	$B$	25	mm	-
	$B_1$	7	mm	-
	$B_2$	11	mm	-
	$D_1$	114.4	mm	-
	$D_{a \max}$	121	mm	-
	$d_1$	94.4	mm	-
	$d_{a \max}$	87	mm	-
	$d_{a \min}$	84	mm	-
	$d_{c \min}$	96	mm	-
	$E$	118.5	mm	-
	$F$	88.5	mm	-
	疲劳极限载荷	$C_{ur}$	27500	N
尺寸	$r_{1 \min}$	1.5	mm	-
	$r_{a \max}$	1.5	mm	-
	$r_{al \max}$	1.5	mm	-
	$r_{\min}$	1.5	mm	-
	$s$	1.2	mm	距离中心位置的轴向偏移
说明		HJ215-E		型号, L 型圈
重量	$m$	1300	g	质量

FAG NJ215-E-TVP2 + HJ215-E图片

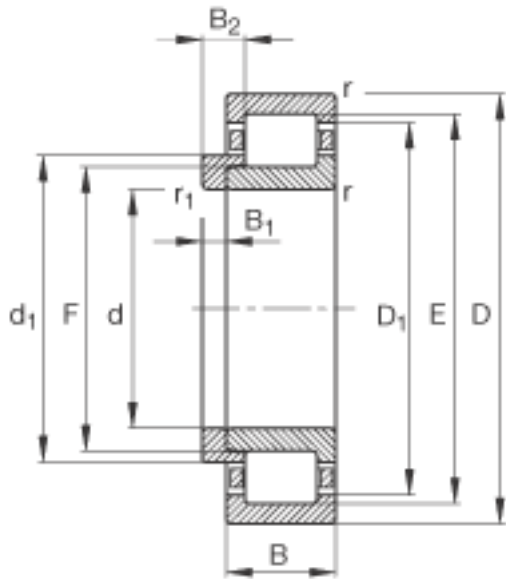

参考资料:<http://www.sozhou.com/p/72ddaa8e.html>

