


FAG NJ2204-E-TVP2 + HJ2204-E参数

尺寸	d	20	mm	-	
	D	47	mm	-	
	B	18	mm	-	
	B ₁	3	mm	-	
	B ₂	6.5	mm	-	
	D ₁	38.8	mm	-	
	D _{a max}	41	mm	-	
	d ₁	29.7	mm	-	
	d _{a max}	26	mm	-	
	d _{a min}	24	mm	-	
	d _{c min}	32	mm	-	
	E	41.5	mm	-	
	F	26.5	mm	-	
	r _{1 min}	0.6	mm	-	
	r _{a max}	1	mm	-	
	r _{al max}	0.6	mm	-	
	r _{min}	1	mm	-	
	s	1.8	mm	距离中心位置的轴向偏移	
	说明		HJ2204-E		型号, L 型圈
	重量	m	150	g	质量
m ₁		12	g	质量, L 型圈	
基本额定载荷	C _r	38500	N	基本额定动载荷, 径向	
	C _{0r}	31000	N	基本额定静载荷, 径向	
极限转速	n _G	19200	r/min	极限转速	
参考转速	n _B	11400	r/min	参考速度	
疲劳极限载荷	C _{ur}	5100	N	疲劳极限载荷, 径向	

FAG NJ2204-E-TVP2 + HJ2204-E图片

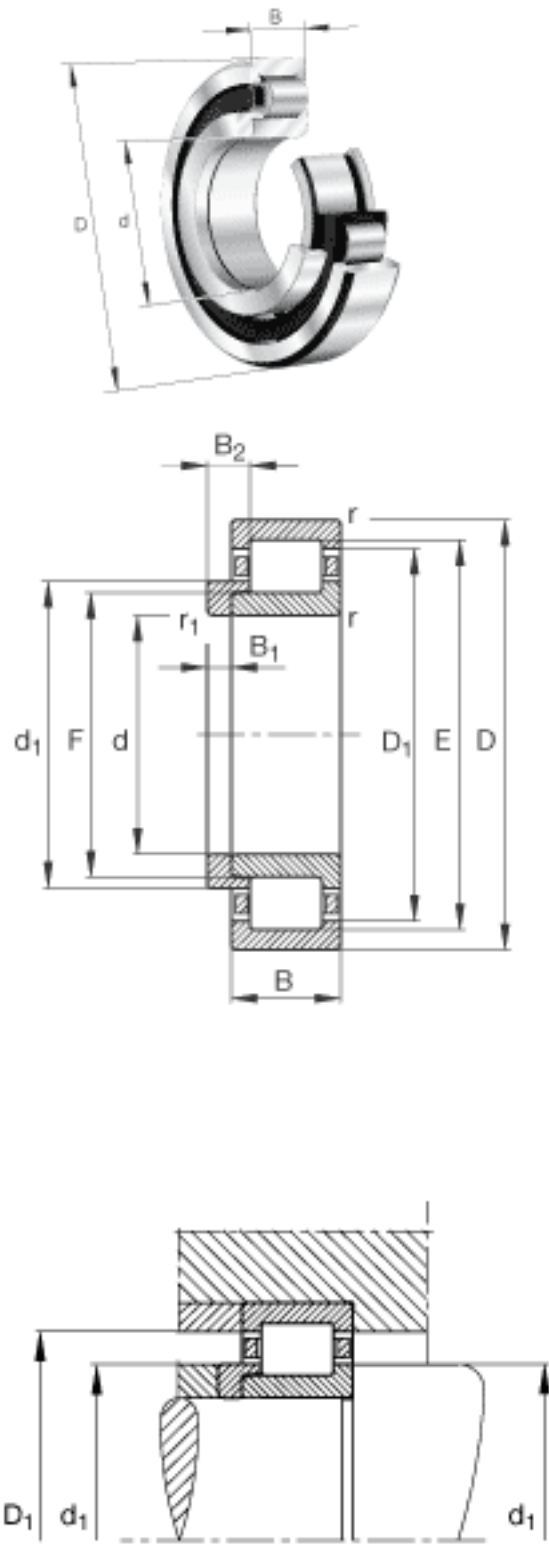

参考资料:<http://www.sozhou.com/p/8655c4b3.html>

