
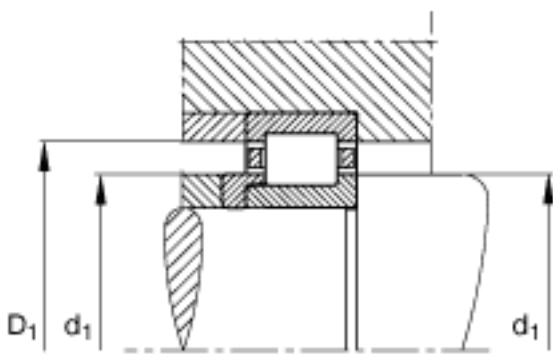


FAG NJ316-E-TVP2 + HJ316-E参数

尺寸	d	80	mm	-	
	D	170	mm	-	
	B	39	mm	-	
	B ₁	11	mm	-	
	B ₂	17	mm	-	
	D ₁	143.9	mm	-	
	D _{a max}	158	mm	-	
	d ₁	110.4	mm	-	
	d _{a max}	99	mm	-	
	d _{a min}	92	mm	-	
	d _{c min}	114	mm	-	
	E	151	mm	-	
	F	101	mm	-	
	r _{1 min}	2.1	mm	-	
	r _{a max}	2.1	mm	-	
	r _{al max}	2.1	mm	-	
	r _{min}	2.1	mm	-	
	s	0.7	mm	距离中心位置的轴向偏移	
	说明		HJ316-E		型号, L 型圈
	重量	m	4030	g	质量
m ₁		456	g	质量, L 型圈	
基本额定载荷	C _r	300000	N	基本额定动载荷, 径向	
	C _{0r}	275000	N	基本额定静载荷, 径向	
极限转速	n _G	4800	r/min	极限转速	
参考转速	n _B	4150	r/min	参考速度	
疲劳极限载荷	C _{ur}	49500	N	疲劳极限载荷, 径向	

FAG NJ316-E-TVP2 + HJ316-E图片

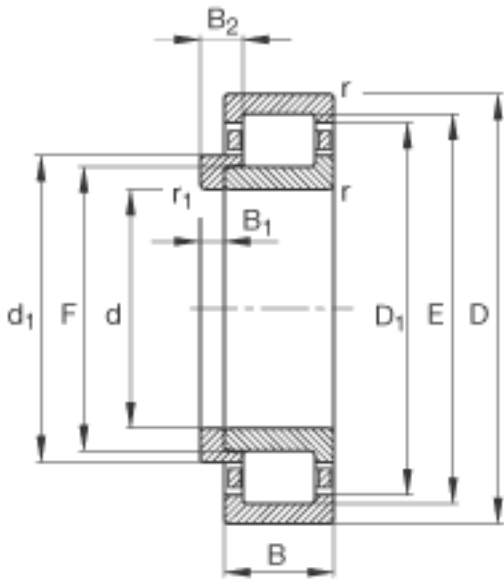

参考资料:<http://www.sozhou.com/p/e12bd88a.html>

